CAT®

AUXILIARY PRODUCT BY CATERPILLAR

235D

SUPER LONG DEMOLITION EXCAVATOR

SPEC SHEET SUPPLEMENT

Note : For standard specifications and features, refer to standard specification sheet for this machine. Machine shownmay include optional equipment.

Cat 3306 Diesel Engine
Gross Power . . . . . 199 kW/267 HP
Flywheel Power . . . 186.5 kW/250 HP
Work Tool Size Recommendation:
Concrete Crusher. . . 3 Tons Max Wt
Operating Weight . . . . . .
. . . . . 61 364 kg/135 000 lbs

The 235D Demolition arrangement features a complete machine ideal for demolishing tall buildings in congested areas. Auxiliary Equipment work tools such as concrete crushers and steel shears are available through your Caterpillar dealer.

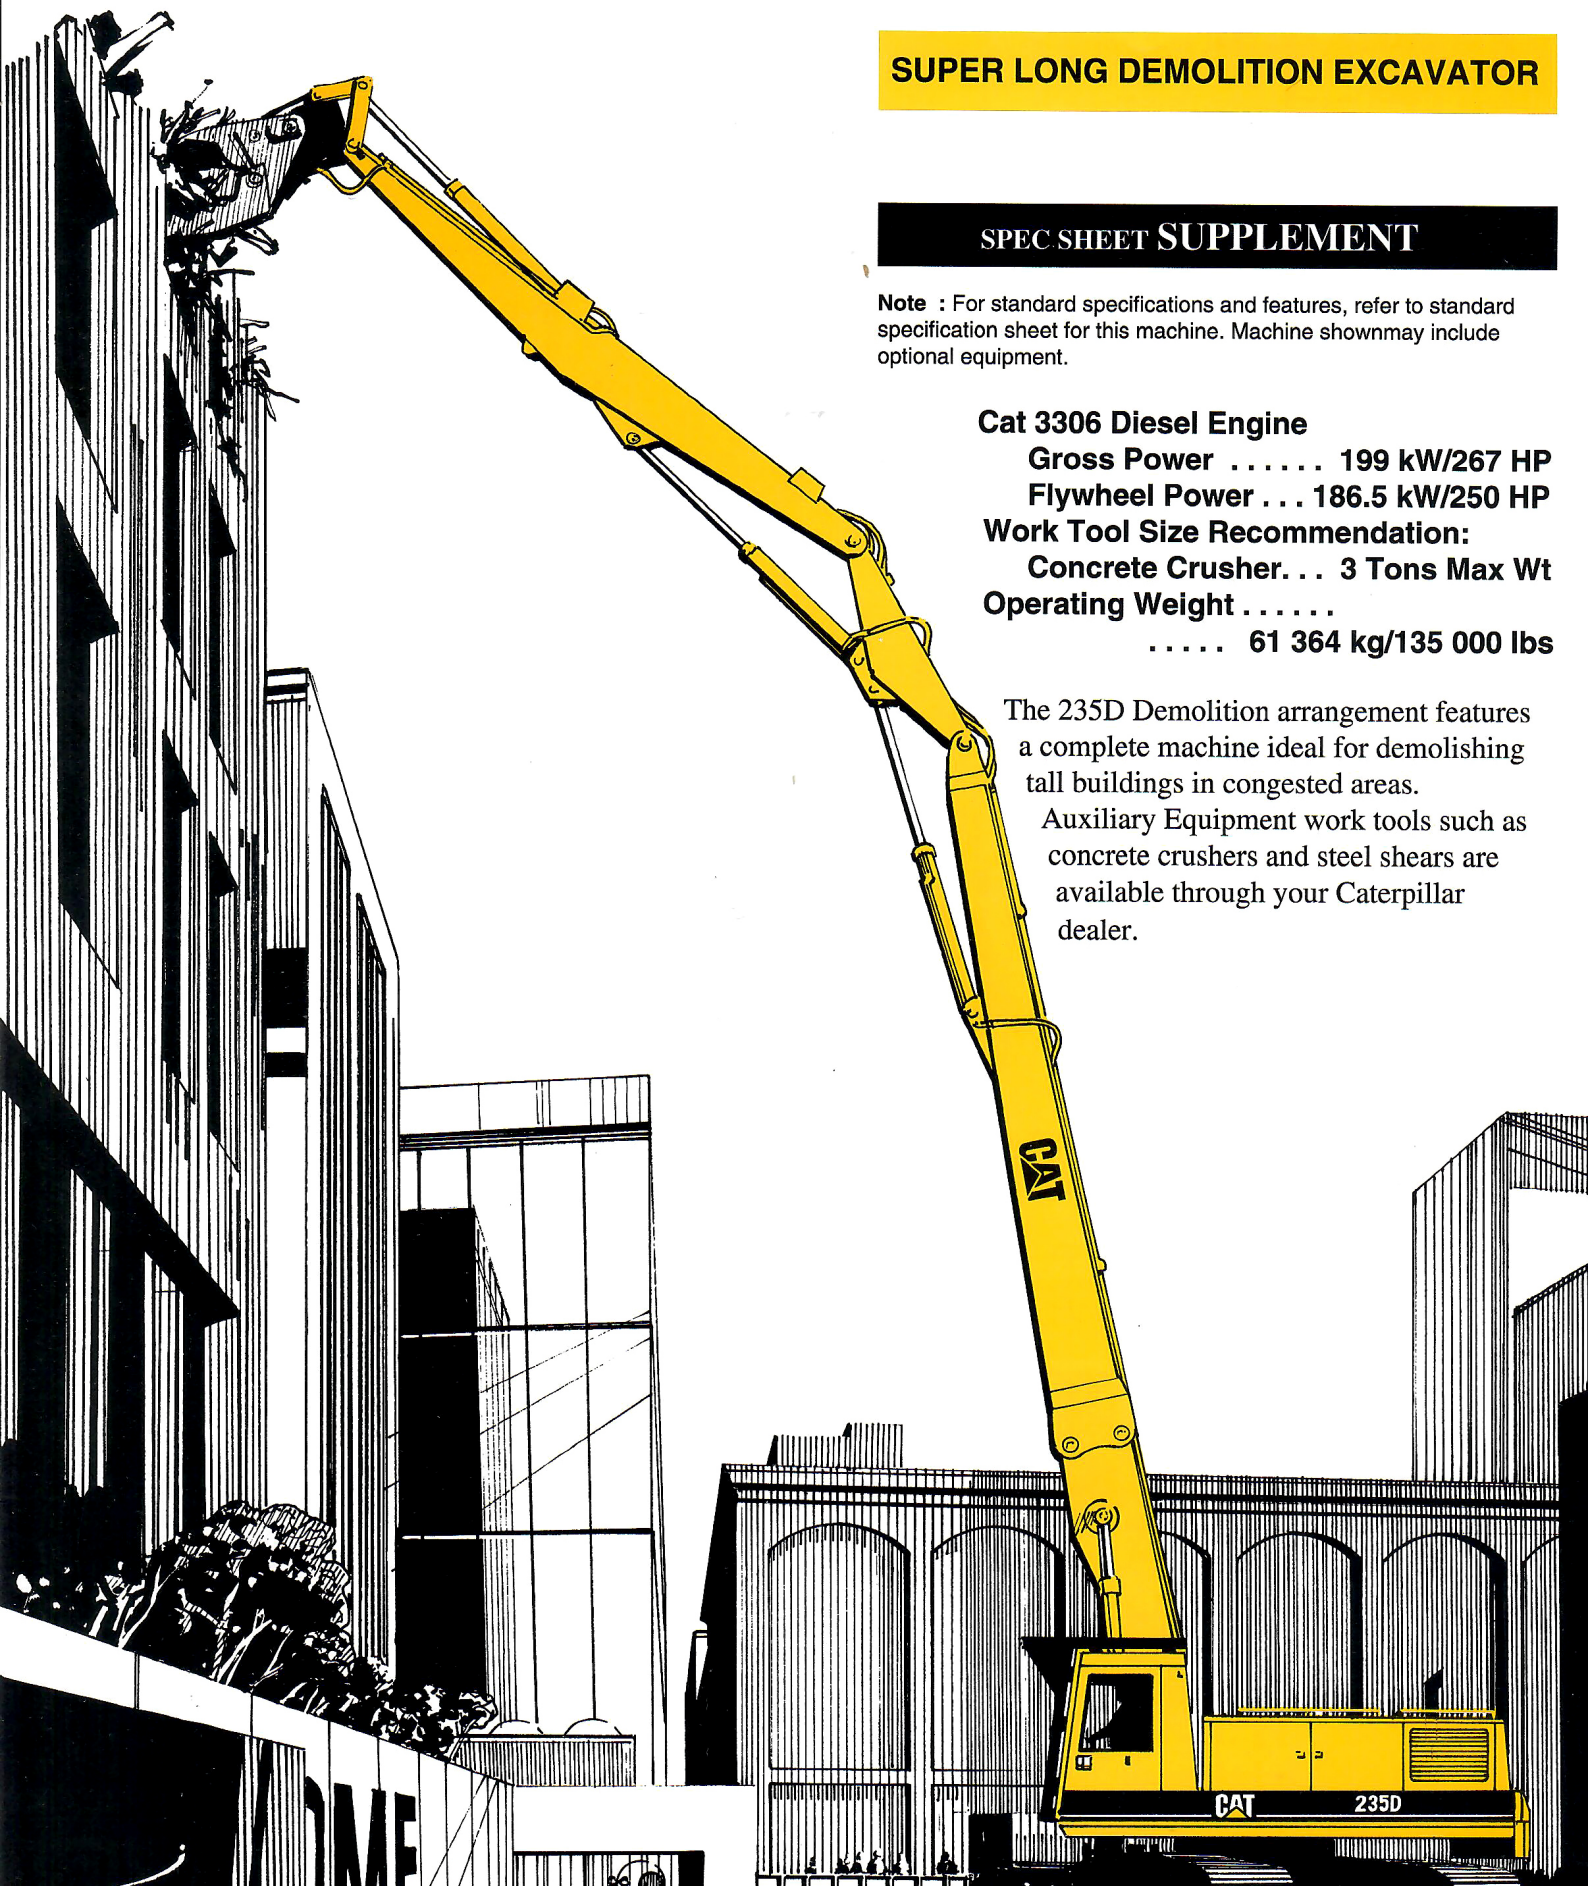

STANDARD EQUIPMENT

■ **HYDRAULIC SYSTEM** automatically converts engine power into maximum tool force. ... then instantly converts to speed for lifting, swinging, releasing, or travel in any combination.
Ready to go auxiliary controls for use with a rotating concrete crusher.

■ **LARGER HEAVY DUTY COUNTER-WEIGHT** for maximum stability throughout the recommended working range.

■ **FALLING OBJECT GUARD (FOG)** top and front is standard.

■ **ELECTRONIC WARNING DEVICE** alerts operator if boom moves out of the recommended working range.

■ **3 PIECE BOOM ARRANGEMENT** capable of reaching 24 meters. Optional boom extension giving an additional 2 meters reach.

■ **ENLARGED LEXAN WINDOW** in the cab roof providing enhanced visibility to the work tool.

■ **CHECK VALVES** on all boom and stick cylinders.

RANGE DIAGRAM

Note: Range is applicable in 360°

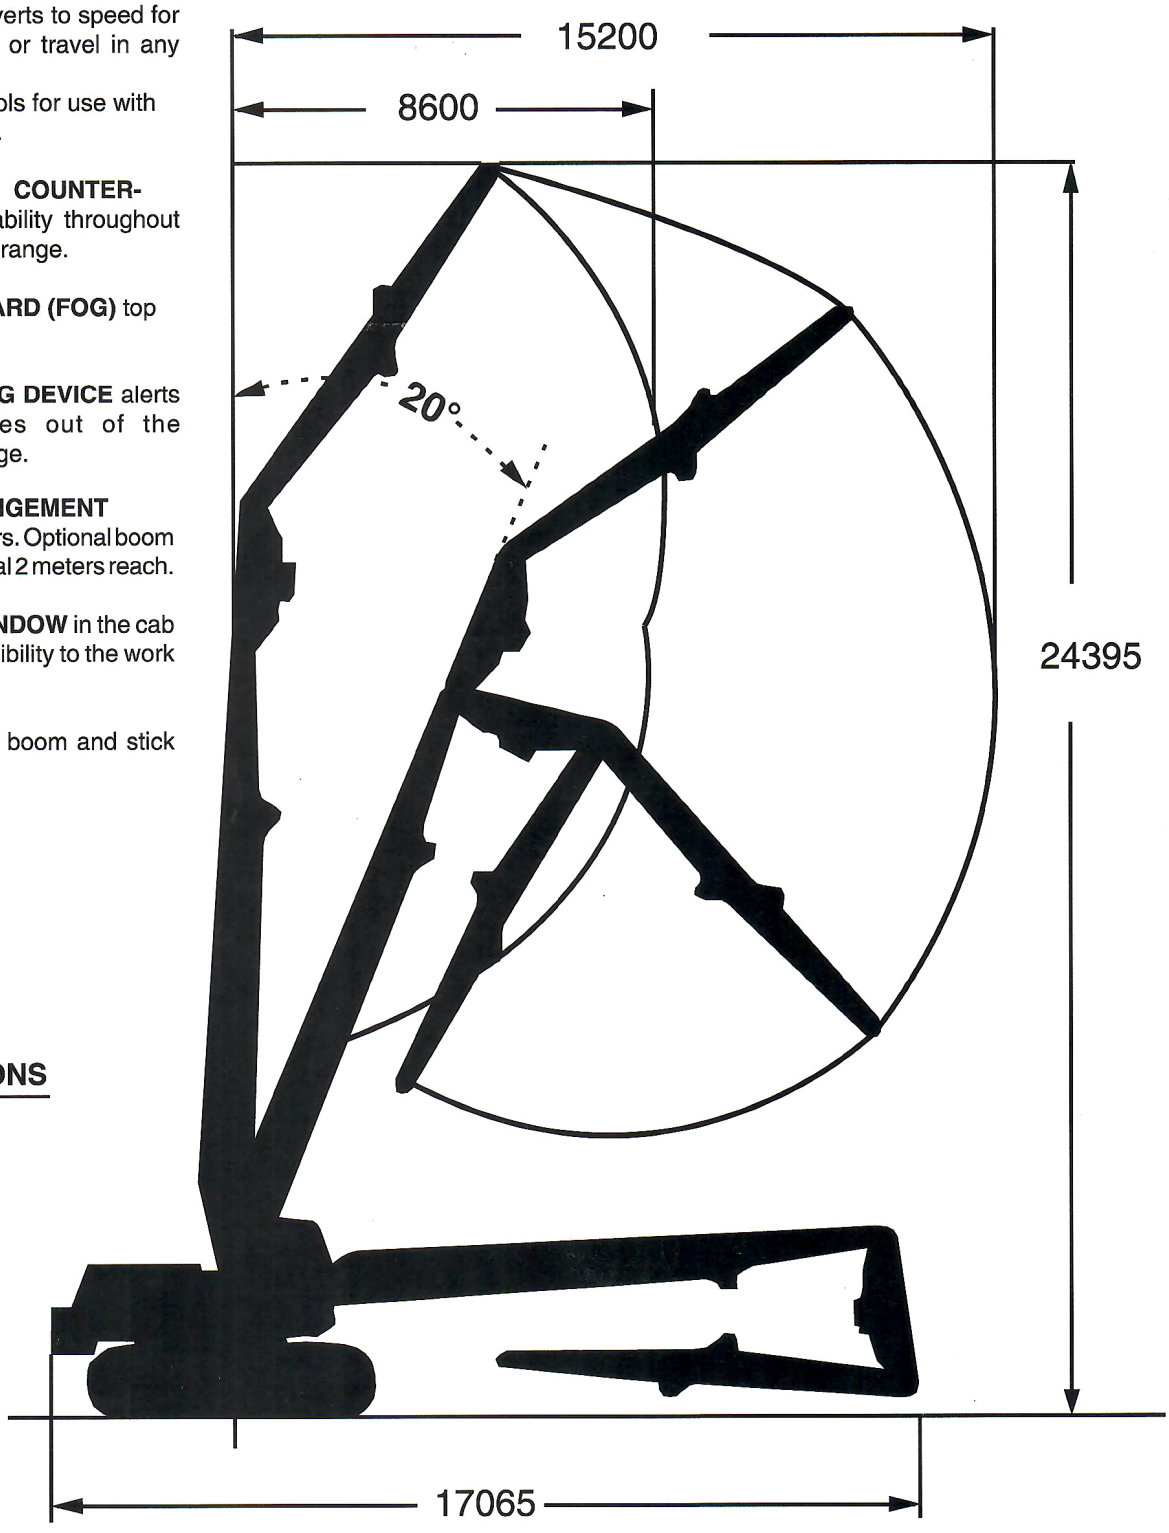

SHIPPING DIMENSIONS

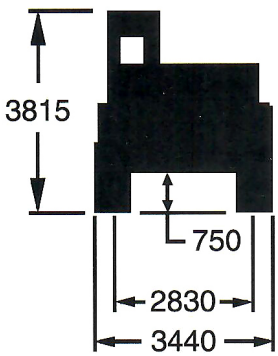

CATERPILLAR

Materials and specifications are subject to change without notice.